

Indoor LED Product Display Stand

Four-sided 320 × 800 mm indoor LED display stand with mobile APP content control — built for dynamic in-store advertising in retail, F&B and exhibition spaces.

360° four-sided display


P1.25 – P2.5

650 cd/m² indoor

GOB protected

Lockable pulley wheels

APP content control

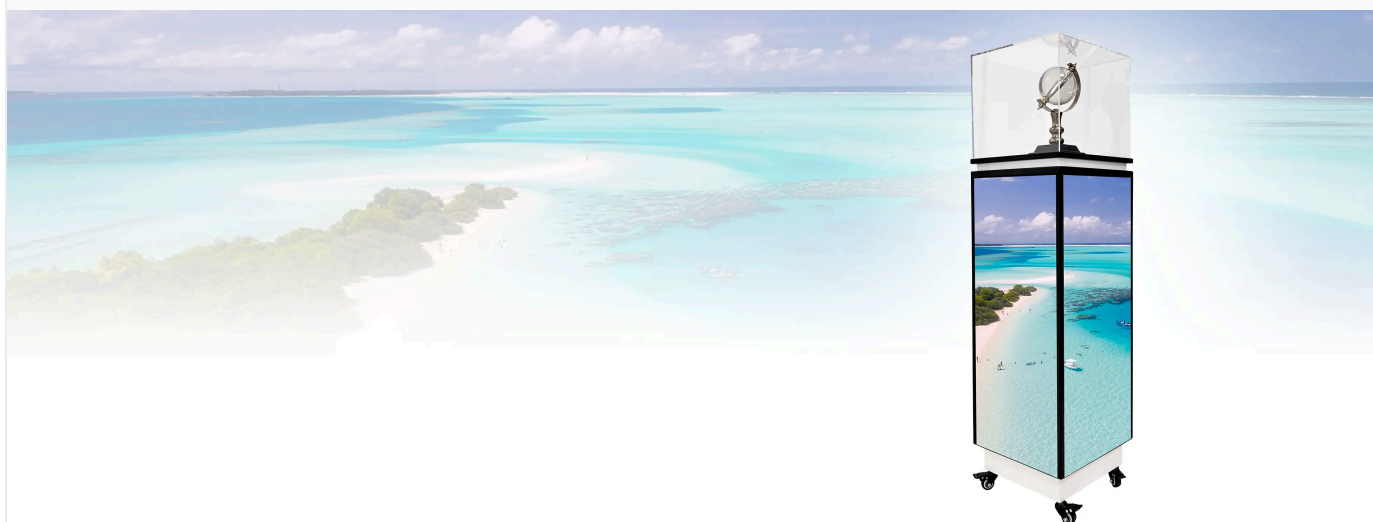

Key Features

- **Four-sided 360° display** — 320 × 800 mm × 4 sides, 1.024 m² display area.
- **Indoor brightness 650 cd/m²** — 3840 Hz / 7680 Hz refresh, flicker-free on camera.
- **Mobile APP content control** — change content from a phone, no technical service needed.
- **Low power** — 123 W average; 410 W max, 27 kg total weight.
- **Ultra HD, GOB protected** — P1.25 – P2.5 pitch; GOB coated, waterproof & anti-collision.
- **Bezel design, plug & play** — ready to use out of the box.
- **Lockable pulley wheels** — move and lock the stand along the store floor plan.
- **Front maintenance** — magnetic module adsorption for fast front-side service.

Where It Works — Malls, F&B & Exhibitions



Shopping Malls & Atriums



Restaurants, Cafés & Bars



Exhibitions & Museums

Technical Specifications

Item	Specification
Model	P1.25 / P1.538 / P1.86 / P2 / P2.5
Pixel Pitch	P1.25 mm / P1.538 mm / P1.86 mm / P2 mm / P2.5 mm
Module Size	320 × 160 mm
Module Resolution	256 × 128 / 208 × 104 / 172 × 86 / 160 × 80 / 128 × 64 dot
Lamp Bead / Craft	1010+GOB / 1212+GOB / 1515+GOB — GOB coated, waterproof & anti-collision
Scan Mode	64S / 52S / 43S / 40S / 32S
Number of Modules	1 × 5 × 4
Display Size	320 × 800 mm × 4 sides
Display Area	1.024 m ²
Full Screen Resolution	256 × 640 × 4 / 208 × 520 × 4 / 172 × 430 × 4 / 160 × 400 × 4 / 128 × 320 × 4
Brightness	650 cd/m ² (indoor)
Refresh Frequency	3840 Hz / 7680 Hz
Gray Level	14–16 bit
Maintenance Method	Magnetic adsorption, front maintenance
Average Power Consumption	123 W
Max Power Consumption	410 W
Whole Screen Weight	27 kg
Mobility / Installation	Lockable pulley wheels, bezel design
Content Control	Mobile APP content upload, plug & play

Notes: Specifications are subject to change without notice. Product images are for illustration purposes only. Values refer to the standard four-sided configuration; the unit is supplied with a bezel design and lockable pulley wheels.

Options & Customisation

- Pixel pitch selection: P1.25 – P2.5
- APP content control setup
- Module layout 1 × 5 × 4 (320 × 160 mm)
- OEM / ODM enquiries welcome

Riotouch — Indoor LED Product Display Stand
Datasheet requests & quotations:

www.riotouch.com
hello@riotouch.com